

## Full Voltage, Reversing Contactors

## Frame B



## Contactors with Screw Terminals, Frame B—Maximum UL/CSA Ratings

Single-Phase hp Ratings		Three-Phase hp Ratings				Spare Auxiliary Contacts		Catalog Number <sup>①</sup>
115V	230V	200V	230V	460V	575V	K1M	K2M	
1/4	1	1-1/2	2	3	5	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	<b>XTCR007B21_</b>
1/2	1-1/2	2	3	5	7-1/2	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR009B21_
1/2	2	3	3	7-1/2	10	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR012B21_

## Contactors with Screw Terminals, Frame B—Maximum IEC Ratings

AC-3 I <sub>e</sub> (A)	Three-Phase Motors 50–60 Hz				Spare Auxiliary Contacts		Catalog Number <sup>①</sup>
	220/230V	380/400V	415V	660/690V	K1M	K2M	
7	2.2	3	4	3.5	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	<b>XTCR007B21_</b>
9	2.5	4	5.5	4.5	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR009B21_
12	3.5	5.5	7	6.5	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR012B21_

## Frame C



## Contactors with Screw Terminals, Frame C—Maximum UL/CSA Ratings

Single-Phase hp Ratings		Three-Phase hp Ratings				Spare Auxiliary Contacts		Catalog Number <sup>①</sup>
115V	230V	200V	230V	460V	575V	K1M	K2M	
2	3	5	5	10	15	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR018C21_
2	5	7-1/2	7-1/2	15	20	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR025C21_
3	5	10	10	20	25	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR032C21_

## Contactors with Screw Terminals, Frame C—Maximum IEC Ratings

AC-3 I <sub>e</sub> (A)	Three-Phase Motors 50–60 Hz				Spare Auxiliary Contacts		Catalog Number <sup>①</sup>
	220/230V	380/400V	415V	660/690V	K1M	K2M	
18	5	7.5	8	11	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR018C21_
25	7.5	11	14.5	14	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR025C21_
32	10	15	18	17	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	$\begin{matrix} \text{—} \\ \diagdown \\ \text{63} \\ \diagup \\ \text{64} \end{matrix}$	XTCR032C21_

**Note**

<sup>①</sup> Underscore ( \_ ) indicates magnet coil suffix required. See **Page V5-T27-54**.

# 27.1

## IEC Contactors and Starters


### XT IEC Power Control

27

Approximate Dimensions in mm [in]

#### XTCR Reversing Combination

##### Frames B-D

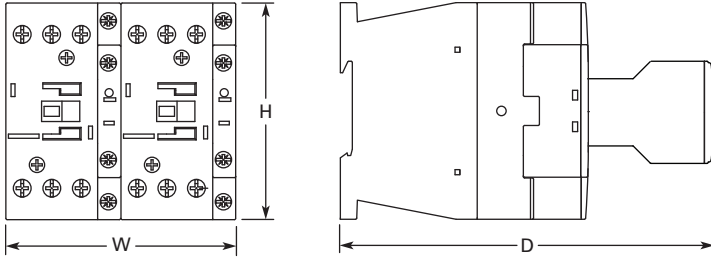

##### Frame B (7-15A)

W	H	D
90	68	117
[3.54]	[2.68]	[4.61]

##### Frame C (18-32A)

W	H	D
90	85	138
[3.54]	[3.34]	[5.43]

##### Frame D (40-65A)

W	H	D
110	115	146.8
[4.33]	[4.53]	[5.78]

##### Frames F-G

